


# APD 1650M

Mitsubishi  
Stamford  
D+ &



ISO8528

GC ; ) &



2000/14/EC

&\$\$\$#/( #

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	1650,00	1320,00	1500,00	1200,00	2165,00

fDGDŁ

=GC ; ) &

) & z

fDF DŁ

z&(

=GC

## Standard Specifications

(\*# \$s

fl

!

Ł

z

z

ALTERNATOR

TRANSFER SWITCH

# APD 1650M

Mitsubishi  
Stamford  
D+' &'



1

Manufacturer		Mitsubishi
Model		S12R-PTAA2
		% \$ \$ ' "# "
		% ( \$ ( " "
		%, &< DQ
	L	49,03
	"	170 X 180
		13.5:1
	fl # ı	"# "
	L	180,00
	L	317,00
AbsorbedAirDischargeReSourceKey.Text	' # "	120,00
	' # "	1800
fl ' # "ı		
	° C	318
		24 V d.c.
	Load	% \$ \$ ı
	# "	
		367,10

2


		Stamford
	Hz	50
		3
	fl ı	400/230

3

		fl "ı		fl "ı	
	"	"	"	"	L
APD 1650M	13000	4920	2190	2500	2000
		fl "ı		fl "ı	
	"	"	"	"	L
AK 98		7500	2300	3740	1500

4 D+' &'

!

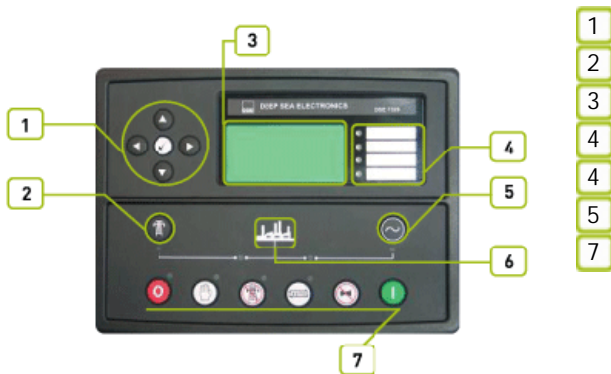



# APD 1650M

Mitsubishi  
Stamford  
D+ &



f@#@Bt  
f@#@!@t

"z" "z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B'\*\$-\$)'\$

6G'9B'\*\$\$\$!\*!&

6G'9B'\*\$\$\$!\*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

"

%, !&\*\$

"

)  
&(\$)

ž

ž

!&(

"

ž

ž

"

"

