

# AC 1650

Cummins  
Mecc Alte  
D+ &



ISO8528

GC, ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z) \$ z' z' D:

|         | "       | "       | "       | "       | Amp     |
|---------|---------|---------|---------|---------|---------|
| 400/230 | 1650,00 | 1429,00 | 1400,00 | 1200,00 | 2020,00 |

fPGE

GC, ) &

,) & z

fDF DE

%\$1

% %&

GC" \$(\*\*

z&(

GC

## Standard Specifications

z

fl

E

z

## ALTERNATOR

## TRANSFER SWITCH

# AC 1650

Cummins  
Mecc Alte  
D+' &'

|                                      |        |                 |        |        |
|--------------------------------------|--------|-----------------|--------|--------|
| Manufacturer                         |        | Cummins         |        |        |
| Model                                |        | KTA 50 G8       |        |        |
|                                      |        | % \$\$\$ "# "   |        |        |
|                                      |        | % &- \$\$\$ "   |        |        |
|                                      |        | 0% % \$\$\$< DQ |        |        |
|                                      | L      | 50,300          |        |        |
|                                      | "      | 159 x 159       |        |        |
|                                      |        | 14,9:1          |        |        |
|                                      | fl # ı | "# "            | 1500   |        |
|                                      | fl ı   | L               | 204,00 |        |
|                                      |        | L               | 420,00 |        |
| AbsorbedAirDischargeReSourceKey.Text | ' # "  | 99,30           |        |        |
| fl ' # ı                             | ' # "  | 2631,00         |        |        |
|                                      | ' # "  | 261,00          |        |        |
|                                      | ° C    | 510,00          |        |        |
|                                      |        | 24 V d.c.       |        |        |
|                                      | Load   | %\$\$ı          | '+)ı   | )\$ı   |
|                                      | # "    | 289,00          | 222,00 | 155,00 |

|             |      |            |  |  |
|-------------|------|------------|--|--|
|             |      | Mecc Alte  |  |  |
|             |      | ECO46 1S/4 |  |  |
|             | Hz   | 50         |  |  |
|             | "    | 1500,00    |  |  |
| 7 cg'       |      | 0,80       |  |  |
|             |      | 3          |  |  |
|             | fl ı | 400/230    |  |  |
|             | A    | 2165,00    |  |  |
| Temperature |      | H          |  |  |


|         |          |         |         |           |         |
|---------|----------|---------|---------|-----------|---------|
|         |          | fl ı    |         | fl ı      |         |
|         | "        | "       | "       | "         | L       |
| AC 1650 | 10100,00 | 5449,00 | 1950,00 | 2450,00   | 2000,00 |
|         |          | fl ı    |         | fl ı      |         |
|         | "        | "       | "       | "         | L       |
| AK 98   | 15100,00 | 9000    | 2270    | 2550/3210 | 1900    |





# AC 1650

Cummins  
Mecc Alte  
D+ & "

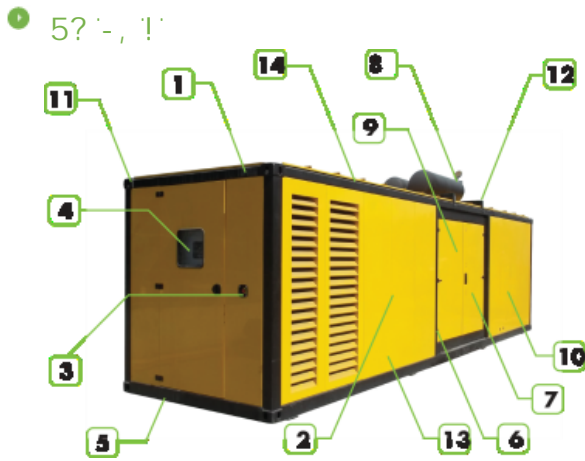

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cable cut locations are under of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system on the canopy.
- 9 special large access doors (marine type) for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

|       |   |           |
|-------|---|-----------|
|       | " | 2270      |
| fl "L | " | 9000      |
| fl "L | " | 2550/3210 |
|       | L | 1900      |