


APD 2500 M

Mitsubishi

D+ &



ISO8528

GC ,) &

CE

2000/14/EC

&\$\$#/(#

z) \$ z'z' D:

	"	"	"	"	Amp
400/230	2500,00	2000,00	2250,00	1800,00	3251,00

fPGE

=GC ,) &

,) & z

fDF D

%\$!

%

%&

=GC " \$(**

z&(

=GC

Standard Specifications

z

fl

E

z

TRANSFER SWITCH

APD 2500 M


Mitsubishi

D+' &'

Manufacturer		Mitsubishi
Model		S16R2-PTAW
		% \$\$' "# "
		&%* +Z\$\$' "
		Q- \$) Z\$\$< DQ
	L	79,900
	"	170x220
		14:1
	fl # ı	"# " 1500
	fl ı	L 290,00
		L 400,00
AbsorbedAirDischargeReSourceKey.Text	' # "	188,00
	' # "	2500,00
		24 V d.c.
	Load	%\$\$ı
	# "	
		469,80

		ECO46-1,5L/4
	Hz	50
	"	2300,00
7 cg'		0,80
		3
	fl ı	400/230

		fl ı		fl ı	
	"	"	"	"	L
APD 2500 M	15700,00	6200,00	2200,00	2800,00	2000,00
		fl ı		fl ı	
	"	"	"	"	L
AK 99	21300	9000	2800	3300/4800	2200

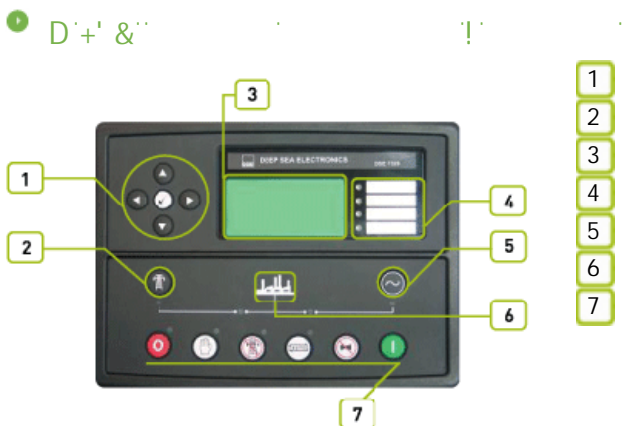

APD 2500 M

Mitsubishi

D+' &'

- 1 8G9ž '+' &\$ž) 5ž&&\$#&(\$
- 2
- 3
- 4 8G9+' &\$ ž fl &&\$ ž "8G9+' &\$ 8G9+' &\$ ž % &l '* (žFG&' &žFG(,) ž

APD 2500 M

Mitsubishi

D+&''

f@z@Bl
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B**\$-\$)

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

&(\$)

ž


ž

ž

APD 2500 M

Mitsubishi

D+' &'

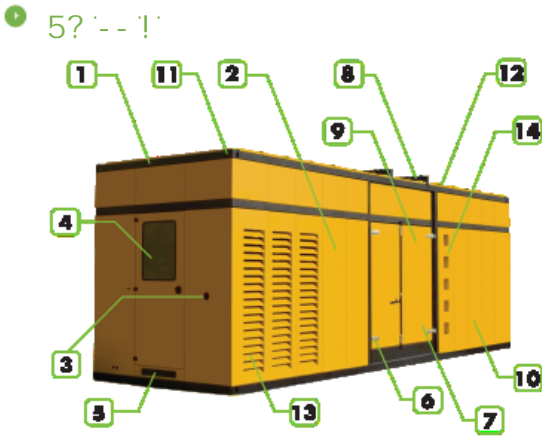

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set
- 5
- 6 Cables out locations are back of the canopy.
- 7 Corrosion-resistant locks and hinges.
- 8 oil could be drained via valve and a hose
- 9 Exhaust system on the canopy.
- 10 special large access doors for easy maintenance
- 11 the cap on the canopy provides easy access to radiator cap.
- 12 Lifting points similar to ISO container , located on each top corner of the canopy.
- 13
- 14 sound proofing materials

	"	2800
fl "L	"	9000
fl "L	"	3300/4800
	L	2200