

# APD 1100 M

Mitsubishi

D+ &



ISO8528

GC ; ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z) \$ z' z' D:

|         | "       | "      | "       | "      | Amp     |
|---------|---------|--------|---------|--------|---------|
| 400/230 | 1100,00 | 880,00 | 1030,00 | 824,00 | 1488,00 |

fPQDE

GC ; ) &

) & z

fDF DE

%\$!

% %&

GC " \$(\*"

z&(

GC

## Standard Specifications

z

fl ! E

z

TRANSFER SWITCH

# APD 1100 M

Mitsubishi


D+' &'



|                                      |        |               |
|--------------------------------------|--------|---------------|
| Manufacturer                         |        | Mitsubishi    |
| Model                                |        | S12H-PTA      |
|                                      |        | %\$\$' "# "   |
|                                      |        | %&\$Z\$' "    |
|                                      |        | 0% * +Z\$< DQ |
|                                      | L      | 37,110        |
|                                      | "      | 150X175       |
|                                      |        | 14:1          |
|                                      | fl # ı | "# " 1500     |
|                                      | fl ı   | L 200,00      |
|                                      |        | L 244,00      |
| AbsorbedAirDischargeReSourceKey.Text | ' # "  | 83,00         |
|                                      | ' # "  | 1800,00       |
|                                      |        | 24 V d.c.     |
|                                      | Load   | %\$!ı         |
|                                      | # "    |               |
|                                      |        | 226,00        |

|      |      |             |
|------|------|-------------|
|      |      | ECO43-1LN/4 |
|      | Hz   | 50          |
|      | "    | 1100,00     |
| 7cg' |      | 0,80        |
|      |      | 3           |
|      | fl ı | 400/230     |

|            |         |         |         |         |         |
|------------|---------|---------|---------|---------|---------|
|            |         | fl ı    |         | fl ı    |         |
|            | "       | "       | "       | "       | L       |
| APD 1100 M | 8940,00 | 4400,00 | 2100,00 | 2200,00 | 1500,00 |
|            |         | fl ı    |         | fl ı    |         |
|            | "       | "       | "       | "       | L       |
| AK 96      | 12590   | 7500    | 2300    | 2500    | 1900    |

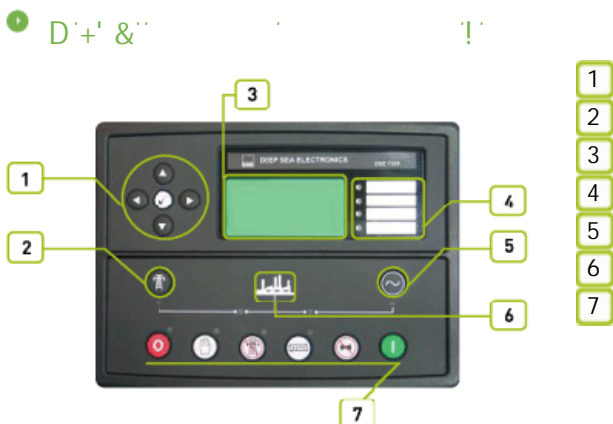

# APD 1100 M

Mitsubishi

D+' &'



- 1 8G9ž ' + ' &\$ž ) 5ž&&\$#&(\$
- 2
- 3
- 4 8G9+' &\$ ž &&\$ ž ž 8G9+' &\$ 8G9+' &\$ ž % &I '\* ( žFG&' &žFG(, ) ž ž

# APD 1100 M

Mitsubishi

D+&''



f@z@Bl  
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'\*\$-\$)'\$

6G'9B'\*\$\$\$!\*!&

6G'9B'\*\$\$\$!\*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&\*(

&(\$)

ž


ž

ž

# APD 1100 M

Mitsubishi

D+' &'

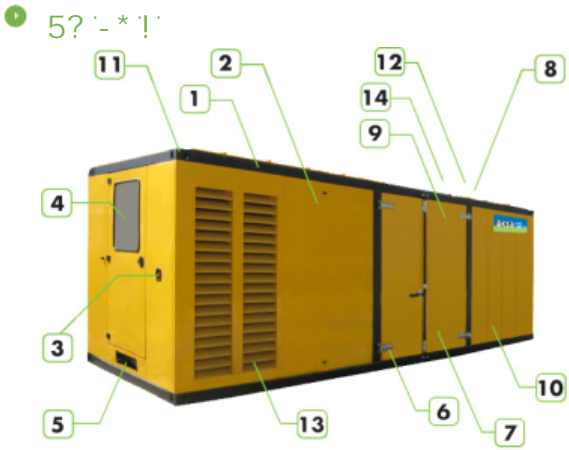

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cable out locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

|       |   |      |
|-------|---|------|
|       | " | 2300 |
| fl "L | " | 7500 |
| fl "L | " | 2500 |
|       | L | 1900 |