


# AC 500

Cummins  
Mecc Alte  
D+ &



ISO8528

GC, ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z) \$' z'z' D:

	"	"	"	"	Amp
400/230	500,00	400,00	455,00	364,00	656,00

fPQDE

GC, ) &

,) & z

fDF DE

%\$1

% % &

GC " \$(\*\*

z&(

GC

## Standard Specifications

z

fl

E

z

z

## ALTERNATOR

## TRANSFER SWITCH

# AC 500

Cummins  
Mecc Alte  
D+' &'

Manufacturer		Cummins		
Model		QSX 15 G6		
		% \$\$\$ "# "		
		() - \$\$\$ "		
		0% \$\$\$ < DQ		
	L	15,000		
	"	137 x 169		
		17,0:1		
	fl # 7	"# "	1500	
	fl 7	L	91,00	
		L	66,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	33,00		
	' # "	637,00		
fl ' # 7	' # "	82,20		
	° C	515,00		
		24 V d.c.		
	Load	% \$\$i	'+) i	) \$i
	# "			
		95,90	74,30	51,30


		Mecc Alte
		ECO 40-3S
	Hz	50
	"	500,00
7cg'		0,80
		3
	fl 7	400/230
	A	721,00

		fl 7		fl 7	
	"	"	"	"	L
AC 500	3815,00	3407,00	1550,00	2103,00	850,00
		fl 7		fl 7	
	"	"	"	"	L
MS 80	4815	4810	1606	2615	850

# AC 500

Cummins  
Mecc Alte  
D+' &'

## 1 D+' &'

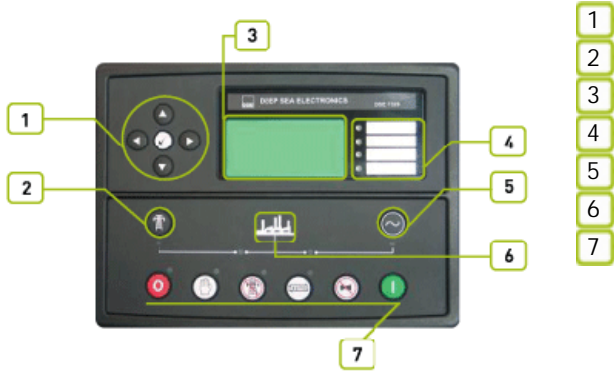

## 2

8G9ž +' &\$ž ) 5ž&&\$#(\$

## 3

8G9ž +' &\$ž ) 5ž&&\$#(\$

## 4

8G9ž +' &\$ž ) 5ž&&\$#(\$

## 5

8G9ž +' &\$ž ) 5ž&&\$#(\$

8G9ž +' &\$ž ) 5ž&&\$#(\$

8G9ž +' &\$ž ) 5ž&&\$#(\$

AC 500

Cummins  
Mecc Alte  
D+ &

f@#@Bt  
f@#@Bt

"z" "z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B '\* \$-) \$

6G'9B '\* \$\$\$! \*!&

6G'9B '\* \$\$\$! \*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&\* (

&(\$)


ž

ž

ž

# AC 500

Cummins  
Mecc Alte  
D+ &

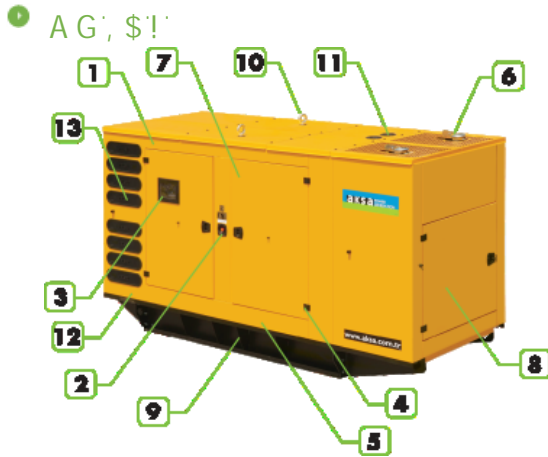

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4810
fl "L	"	2615
	L	850