

AC 2500

Cummins
Stamford
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z'z' D:

	"	"	"	"	Amp
400/230	2500,00	2000,00	2000,00	1600,00	2886,00

fP GDE GC,) &

,) & z

fDF DE

%\$1

%

%&

GC " \$(**

z&(

GC

Standard Specifications

z

fl ! E

z

ALTERNATOR

D: A Z'5JF

TRANSFER SWITCH


AC 2500

Cummins
Stamford
D+' &'

Manufacturer	Cummins		
Model	QSK 60 G13		
		% \$ \$ ' "# "	
		& % (Z \$ \$ ' "	
		Q- \$ % \$ \$ < D Q	
	L	60,200	
	"	159 x 190	
		14,5:1	
	fl # ı	"# "	1500
	fl ı	L	280,00
Absorbed Air Discharge ReSourceKey.Text	' # "	154,40	
	' # "	293,20	
	° C	507,00	
		24 V d.c.	
	Load	% \$ \$ i	' +) i
	# ") \$ i	
		399,00	302,00 210,00

		Stamford
		LVS1804R
	Hz	50
	"	2410,00
7 cg'		0,80
		3
	fl ı	400/230
	A	3478,00
Temperature		H

		fl ı		fl ı	
	"	"	"	"	L
AC 2500	17200,00	6000,00	2494,00	3320,00	2000,00
		fl ı		fl ı	
	"	"	"	"	L
AK 99	22800,00	9000	2800	3300/4800	2200

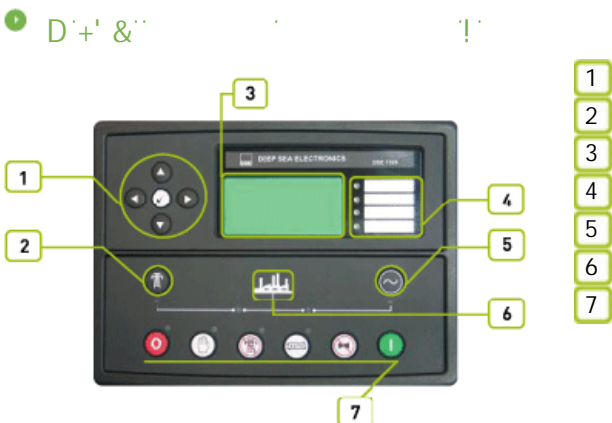

AC 2500

Cummins
Stamford
D+' &'

- 1 8G9ž +' &\$ž)5ž&&\$#&(\$
- 2
- 3
- 4 8G9+' &\$ ž fl
&&\$ ž
"8G9+' &\$
8G9+' &\$ ž
% &I '* (ž
žFG&' &žFG(,) ž ž

AC 2500

Cummins
Stamford
D+' &''



f@z@Bt
f@!@t

"z" "z"

f@z@Bt

971

#

#

#

#



#

6G'9B'*\$-) '\$

6G'9B'*\$ \$\$!*&

6G'9B'*\$ \$\$!*(

f&%) +t

f&)(, t

f&%) \$t



GA 8

!&+""

"% , !&*(

&(\$)


ž

ž

ž

AC 2500

Cummins
Stamford
D+ & "

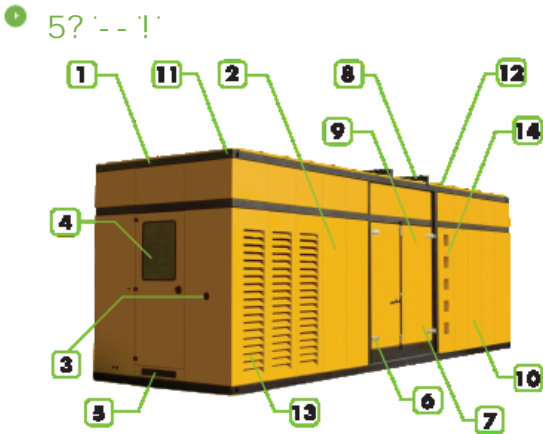

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set
- 5 Cables out locations are back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 8 oil could be drained via valve and a hose
- 9 Exhaust system on the canopy.
- 10 special large access doors for easy maintenance
- 11 the cap on the canopy provides easy access to radiator cap.
- 12 Lifting points similar to ISO container , located on each top corner of the canopy.
- 13 sound proofing materials
- 14

	"	2800
fl "L	"	9000
fl "L	"	3300/4800
	L	2200