




ENG / ALT OPTION	MASS (KG)	DUAL WALL MASS (KG)	CENTER OF GRAVITY FROM OZ	DUAL WALL CENTER POSITION FROM OZ	STUB UP AREA (X)
	WITH OIL & WATER	WITH OIL & WATER	GRAVITY FROM OZ	GRAVITY FROM OZ	
L6114D	5048	5106	5305	5363	536.1
L6114F	5172	5230	5487	5537	536.1
L6114G	5222	5280	5479	5537	536.1

TANK BASE	TANK CAPACITY (L)	
	FILLABLE	USEABLE
STANDARD	887	842
DUAL WALL	908	860


NOTE : DESIGN PRESSURE HEAD 3.7M

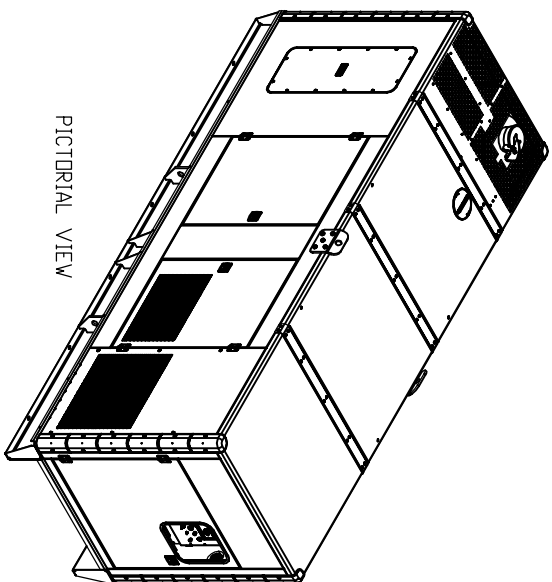



BREAKER STUB-UP LOCATION

STUB-UP AREA A:
 FOR USE WITH
 1250A/1600A NON-MOTORIZED BREAKERS
 1250A-2000A PTS GROUPS
 630A-1600A MOTORIZED BREAKERS


STUB-UP AREA B:
 FOR USE WITH
 630A/800A NON-MOTORIZED BREAKERS
 630A/800A PTS GROUPS

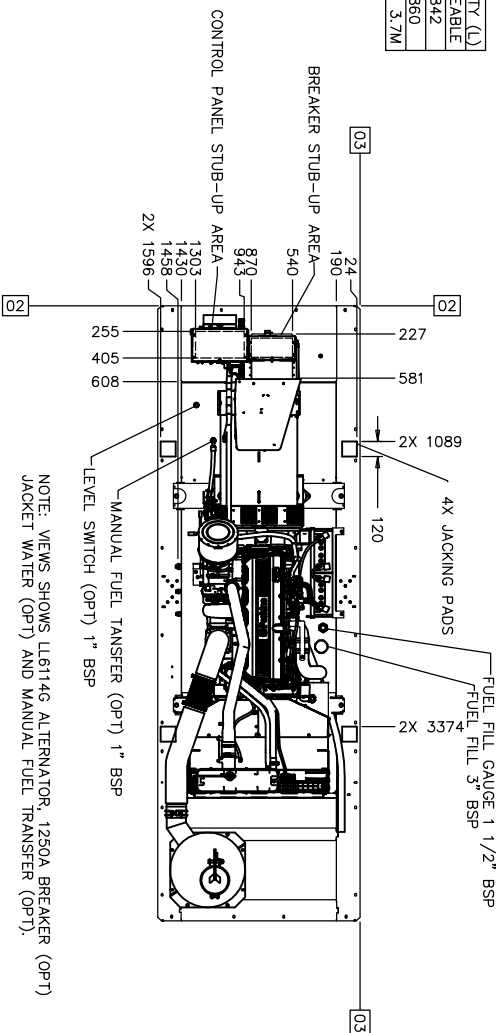

NOTE: VIEWS SHOWS LL6114G ALTERNATOR, 1250A BREAKER (OPT), JACKET WATER (OPT) AND MANUAL FUEL TRANSFER (OPT).

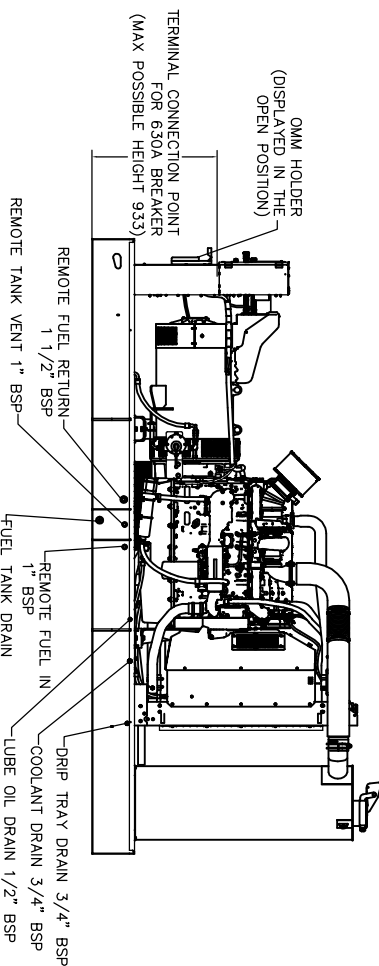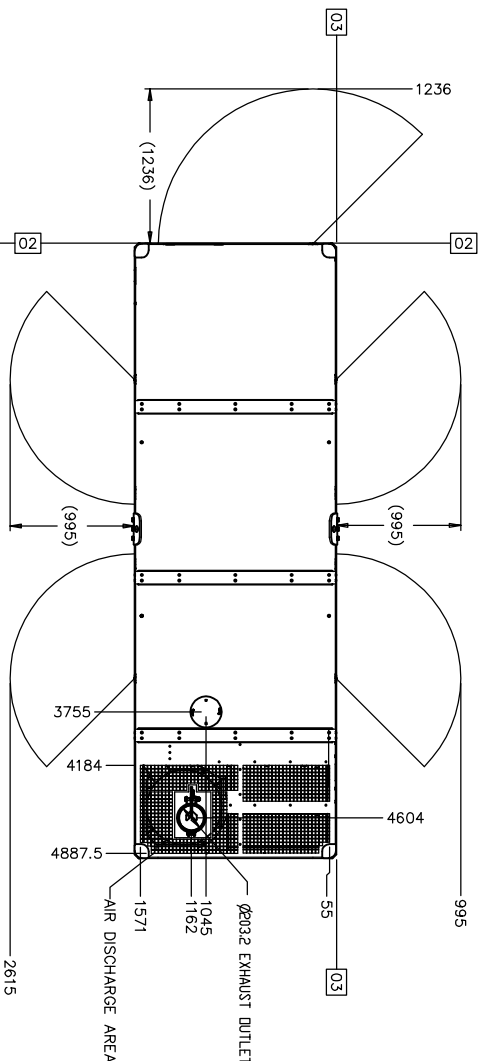

CANDPY REMOVED FOR CLARITY

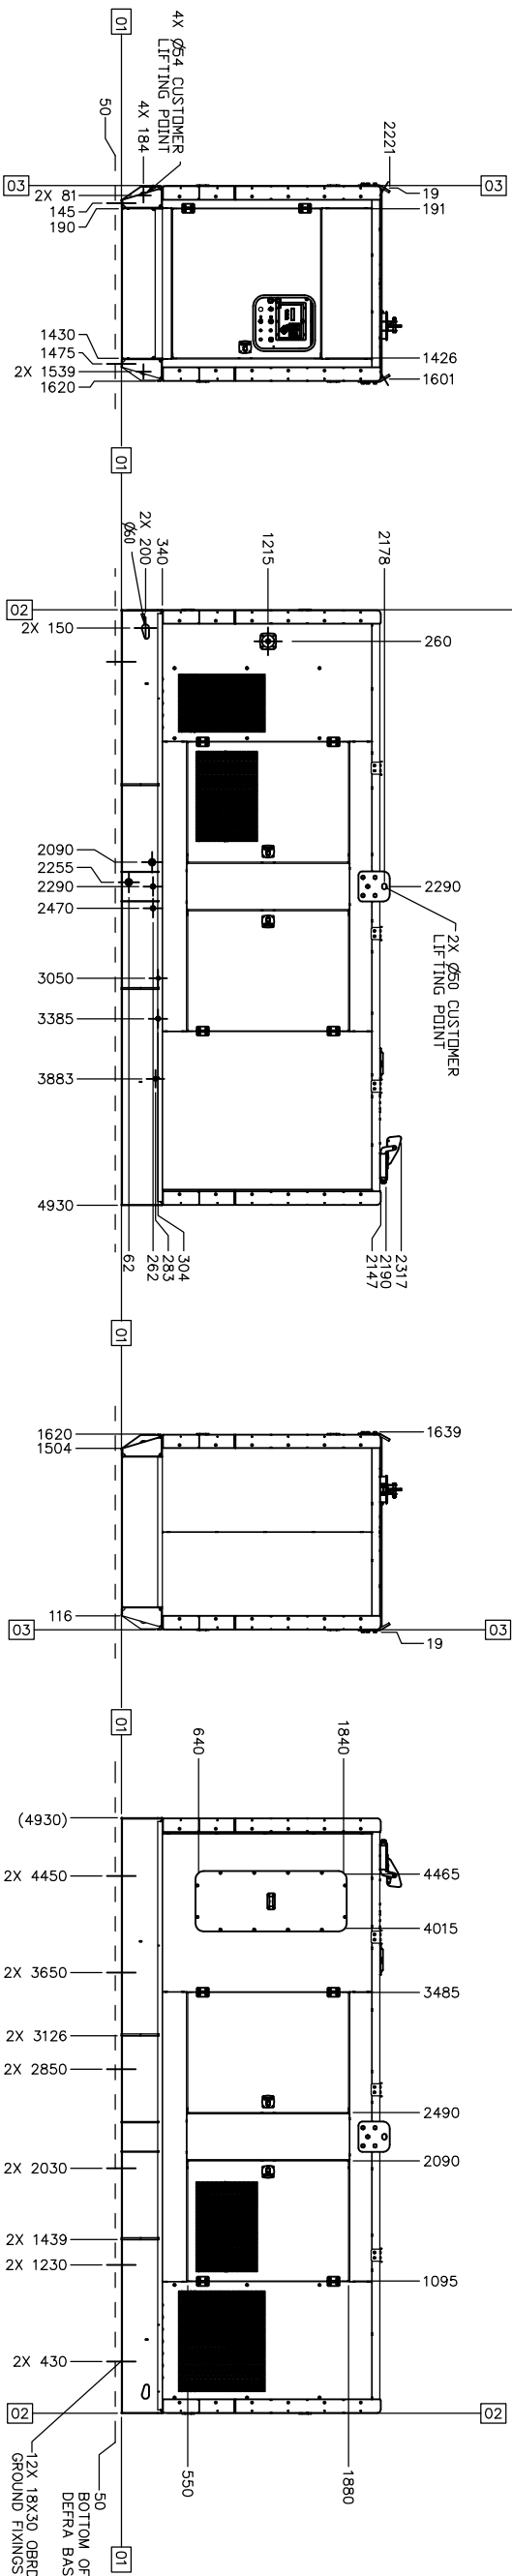

CANDPY - STANDARD 8HR TANKBASE

1E2722A	DRAWING				
1E0013Y	CONFIDENTIALITY				
1E0198R	LETTERS				
1E0507B	IDENT				
1E0001I	INSTR & TOL				



GENERAL AR-COMPL	
(2506 SA W/ DEFRA)	
393-0338	VER CHG DK 01 E